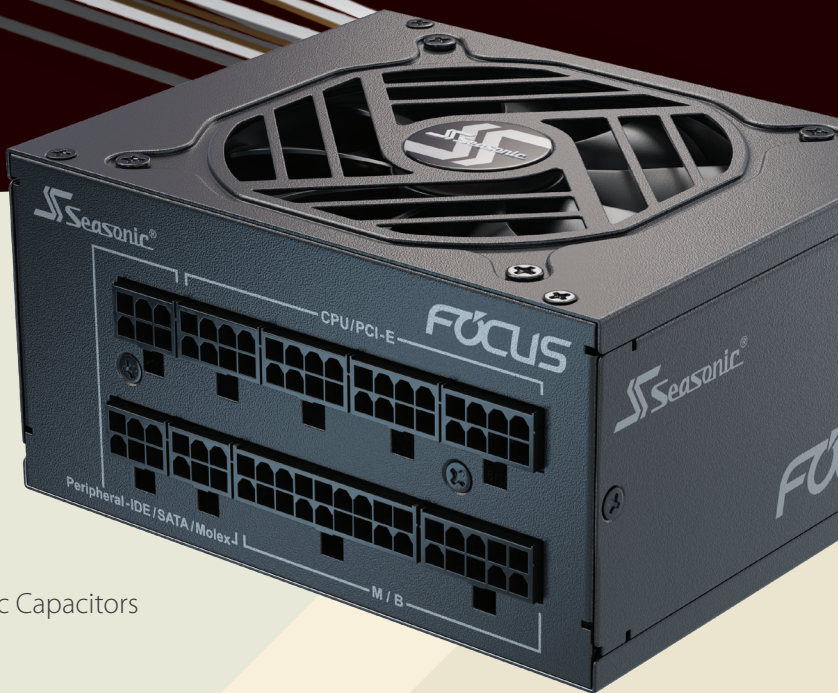


Seasonic®

FOCUS SPX



SPECIAL FEATURES



- ❖ High Efficiency, 80 PLUS® Platinum Certified
- ❖ Fully Modular Cabling Design
- ❖ Compact Size
- ❖ SFX to ATX Expandability
- ❖ 92 mm Fluid Dynamic Bearing (FDB) Fan
- ❖ Seasonic Hybrid Silent Fan Control
- ❖ Highly Reliable Japanese 105 °C Aluminum Electrolytic Capacitors
- ❖ Tight Voltage Regulation (12 V, 5 V and 3.3 V) [± 3%]
- ❖ Cable-free Connection Design
- ❖ 10 Years Warranty

POWER DISTRIBUTION

| Model | +3.3 V | +5 V | +12 V | -12 V | +5 Vsb | Total Power |
|------------|--------|-------|-------|-------|--------|-------------|
| SSR-750SPX | 20 A | 20 A | 62 A | 0.3 A | 3 A | 750 W |
| | | 130 W | 744 W | 3.6 W | 15 W | |
| SSR-650SPX | 20 A | 20 A | 54 A | 0.3 A | 3 A | 650 W |
| | | 120 W | 648 W | 3.6 W | 15 W | |



CONNECTOR QUANTITY

| Model | Cable | Main Power (24P / 20P) 350 mm | EPS 12 V / ATX 12 V (8P / 4P) 400 mm | PCI-E (8P / 6P) | SATA | Peripheral (4P) |
|------------|---|---|---|--------------------|------|--------------------|
| | SSR-750SPX |  | 1 | 2 | 4 | 6 |
| SSR-650SPX |  | 1 | 2 | 4 | 6 | 3 |

10 YEARS
WARRANTY

80 PLUS
PLATINUM

ErP Lot 6
2013 compliant

Safety & EMI / EMC



Protection Features: OPP / OVP / UVP / SCP / OCP / OTP

Dimensions: 125 mm (L) x 100 mm (W) x 63.5 mm (H)



Specifications may change without prior notice