



# BioniX P140

Pressure-optimised 140 mm Gaming Fan  
with PWM PST



- Optimised for static pressure
- Ideal choice on heatsinks, radiators and (partly-) covered case vents
- Broad RPM range for highest performance and low noise level
- Push- or pull-configuration
- PWM Sharing Technology (PST) regulates fan speed synchronously
- Newly developed, very quiet motor
- Extended life span
- Available in multiple distinct colors



# BioniX P140

## Pressure-optimised 140 mm Gaming Fan with PWM PST

The **BioniX P140** fan features completely redesigned fan blades and is optimised for high static pressure. Thus, the **BioniX P140** is especially effective when used on heatsinks and with higher air resistance.

The wide RPM range from 200 to 1950 RPM can be regulated seamlessly and synchronously with other fans thanks to ARCTIC's PWM Sharing Technology (PST).

The newly developed motor with a low coil temperature significantly increases the life span of the fan. Therefore we have extended the warranty to 10 years.



### Specifications

Fan	140 mm, 200 - 1950 RPM (Controlled by PWM)
Airflow	77.6 CFM / 131.92 m <sup>3</sup> /h (@1950 RPM)
Static Pressure	2.85 mm H <sub>2</sub> O (@1950 RPM)
Bearing	Fluid Dynamic Bearing
Noise Level	0.45 Sone (@1950 RPM)
Current / Voltage	0.15 A / 12 V DC
Connector	4-pin Connector + 4-pin Socket
Dimensions	140 (L) x 140 (W) x 28 (H) mm
Weight	181 g

### Maximum Quietness, Minimum Vibration

Even at low speeds the operating sound of the new ARCTIC motor is barely noticeable.

Due to a sinus-magnetizing the new motor only creates about 5 % of the commutator oscillations of a regular DC-motor.

Consequently, there is no need for rubber spacers due to the steady and smooth torque of the new motor.

Fan with newly developed ARCTIC motor

5 % vibration from commutation

Fan with regular motor and anti-vibration rubbers

5 % vibration from commutation

Fan with regular motor without vibration absorption

5 % vibration from commutation

Noise Level




# BioniX P140

## Pressure-optimised 140 mm Gaming Fan with PWM PST

### Optimised for Static Pressure

During the development of the new BioniX P140, special emphasis was placed on a focused airstream and thus a high static pressure. The fan guarantees extremely efficient cooling, even with increased air resistance. Therefore, the BioniX P140 is particularly suitable for use on heatsinks and radiators.

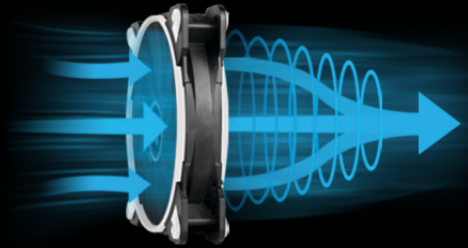


### Extended Life Span

A 10 °C lower motor temperature roughly doubles the life span of a fan. The new ARCTIC motor has a four times longer service life through its low coil temperature. Consequently, we have extended the warranty to 10 years.



**BioniX P140**  
(New ARCTIC Motor)




No-Name 140 mm Fan  
(Typical DC-Motor)

Coil Temperature @ 22 °C  
Ambient Temperature


### More Efficient Technology

The motor is powered by a Neodym-Iron-Boron-Magnet ring of the newest generation, which allows the new BioniX P140 to run much more efficiently than its predecessors. This saves energy and lowers the coil temperature without compromising the performance.

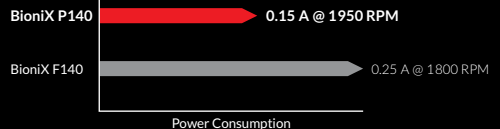

### 200 to 1950 RPM regulated via PWM PST

With a wide range of regulation and the PWM Sharing Technology (PST), the BioniX P140 fan speed can be controlled synchronously with all your other fans together. This keeps noise at a minimum while guaranteeing maximum cooling performance when needed.



### High Quality Bearing

Thanks to an alloy/lubricant combination developed in Germany, friction within the bearing is reduced and greater efficiency is achieved. As a result, there is less heat development as well as less bearing noise, which means you can enjoy a longer service life from your fan.

